#4 DOWELS AT 18" ON CENTER. GREASE
DOWEL ONE END, TO ALLOW MOVEMENT. IN
CASES WHERE A NEW SLAB JOINS AN
EXISTING SLAB DRILL THE EXISTING SLAB TO
RECEIVE DOWELS.

TOOL EDGE WITH 1/4" RADIUS. PROVIDE
CONTINUOUS CAULK JOINT.

6"
3"
3"

9"   9"

CONSTRUCTION JOINT
SCALE: 1"=1'-0"

TOOLED CONTROL JOINT WITH 1/4" RADIUS
EACH SIDE. SPACE AT 6'-0" ON CENTER
MAXIMUM OR AS INDICATED ON PLAN.

1 1/2"

6"
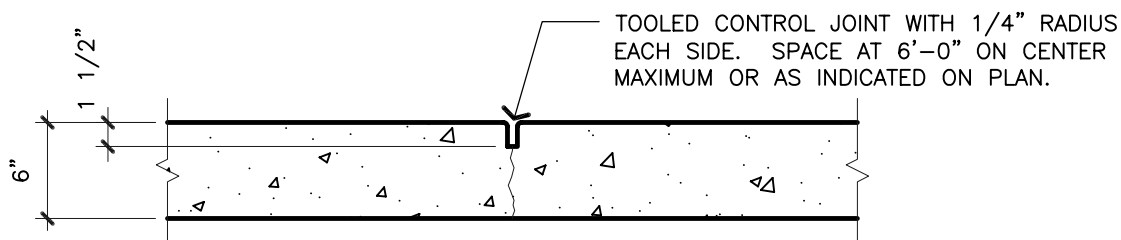
CONTRACTION JOINT
SCALE: 1"=1'-0"

TOOL ALL EDGES WITH 1/4" RADIUS.

PROVIDE CROSS SLOPE FOR POSITIVE
DRAINAGE. MAXIMUM CROSS SLOPE SHALL
BE 2%.

6" THICK CONCRETE SLAB WITH BROOM
FINISH PERPENDICULAR TO TRAFFIC.

6"

4"

4" COARSE AGGREGATE BASE COMPACTED
TO 95% STANDARD PROCTOR DENSITY

COMPACT TOP 6" OF SUBGRADE TO 95%
OF MAXIMUM PROCTOR DENSITY.
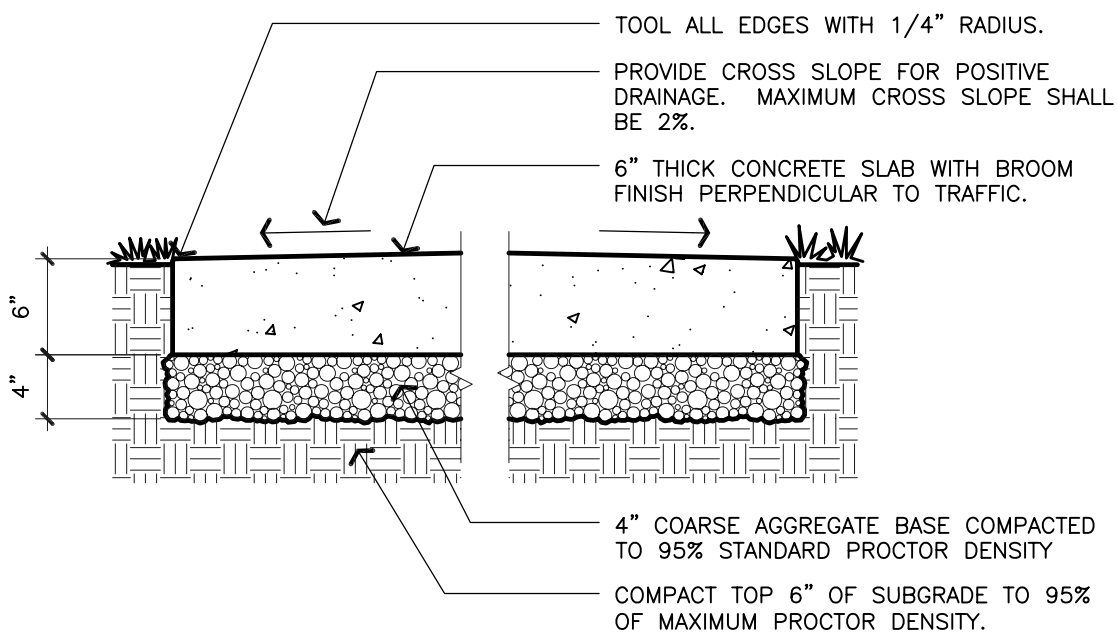
SIDEWALK SECTION
SCALE: 1"=1'0"