


Design Guidelines
Division 10 Specialties
Exterior Building Mounted Signage

- Confirm building name character height with project manager
- All buildings shall have address numbers on address side of building and in appropriate location to direct fire trucks to F.D.C. locations.
- Any deviations from Missouri State University's Design Guidelines should be approved with the project manager.

Building Name and Address

character height building name: 8" or 6"
 character height address: 6"
 letter depth: 1 1/2" for 6" letters
 1 3/4" for 8" letters
 font: ROFFE
 finish: dark bronze anodized
 manufacturer: cast aluminum
 gemini or approved equal

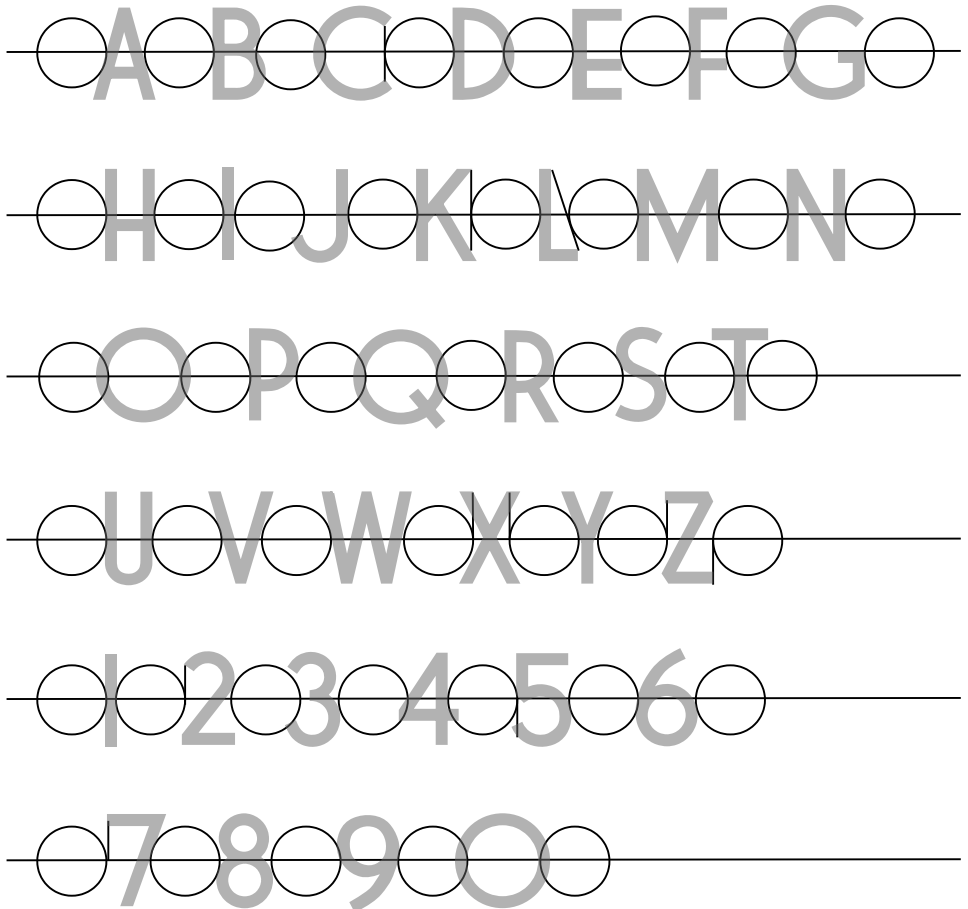

Kerning (Letter Spacing)

kerning is necessary to adjust the spacing of two particular characters to correct visual uneven spacing.

8" tall font- 6" diameter spacing circle
 6" tall font- 4 1/2" diameter spacing circle
 space between words to be 3 spacing circles
 use the letter "o" instead of the number zero

submit mounting template to project manager to approval before installation. lettering shall be kerned.

Mounting

spacer mount studs are set in adhesive cement.
 precut spacers are inserted between the letter and the mounting surface.
 use spacers to achieve 1/2" standoff.
 If cladding does not allow for this mounting method, review and approve alternative mounting with project manager.

