



SINGLE METER HOUSING & PARKING
METER MECHANISM EQUAL TO
DUNCAN MODEL 70 WITH
ELECTRONIC EAGLE. OWNER
FURNISHED CONTRACTOR INSTALLED.

2" NOMINAL DIAMETER GALVANIZED
SCHEDULE 40 PIPE

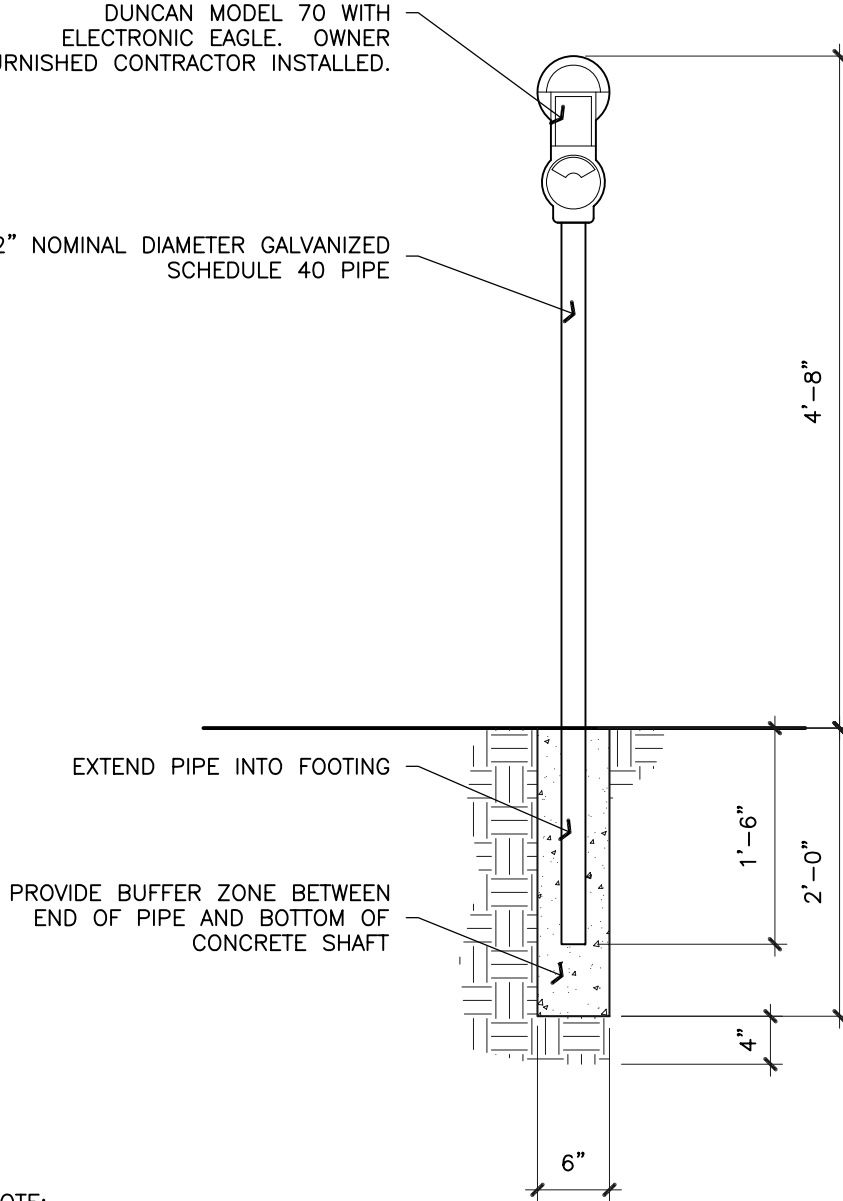

NOTE:


WHERE MORE THAN ONE METER IS TO BE
INSTALLED IN A ROW, THE TOPS AS WELL AS
THE FACE OF ALL METERS SHALL BE ALIGNED.
WHERE NECESSARY SET THE FIRST AND LAST
METER IN A ROW AND PULL A STRING BETWEEN
THE METERS TO ESTABLISH THE PROPER
ALIGNMENT. MINIMUM 48" FROM FINISH GRADE
TO TOP OF METER.



SINGLE PARKING METER


SCALE: 3/4"=1'-0"

DUNCAN MODEL 70 WITH ELECTRONIC EAGLE AND DUPLEX YOKE MOUNT. OWNER FURNISHED CONTRACTOR INSTALLED.

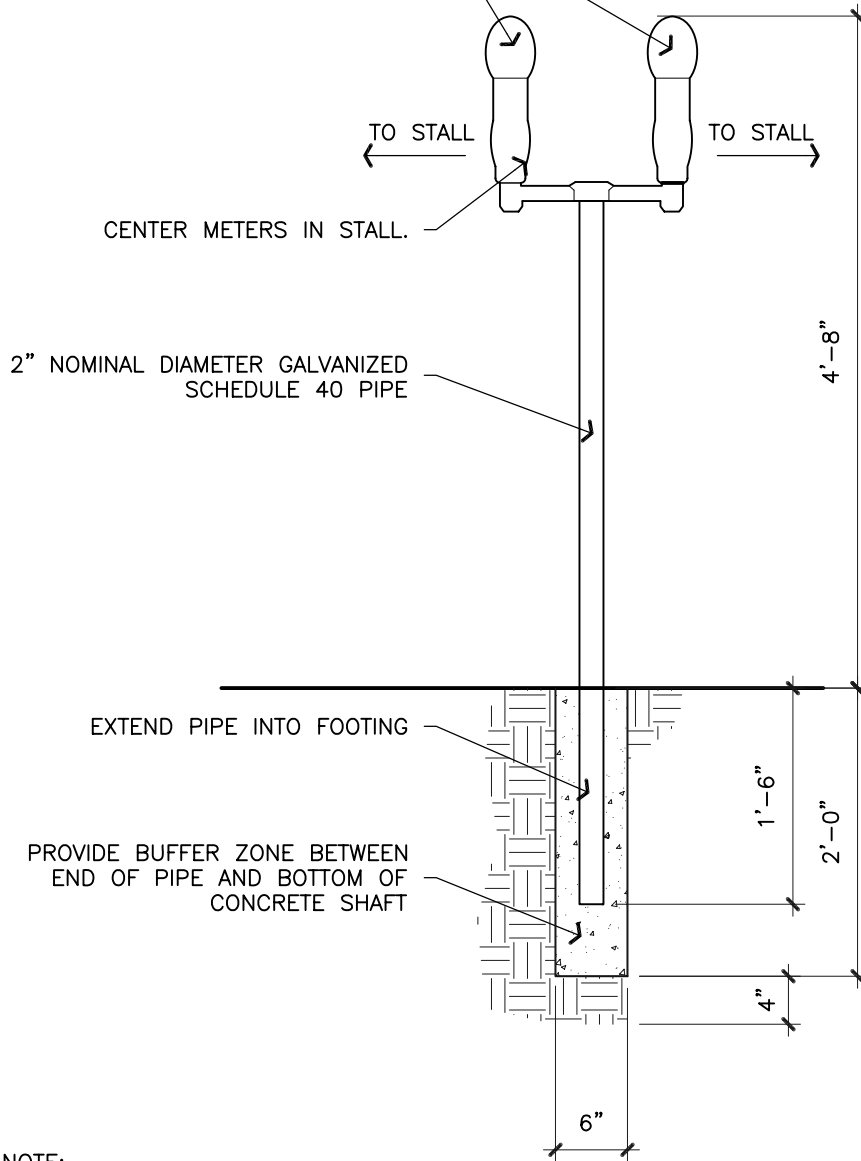

NOTE:

WHERE MORE THAN ONE METER IS TO BE INSTALLED IN A ROW, THE TOPS AS WELL AS THE FACE OF ALL METERS SHALL BE ALIGNED. WHERE NECESSARY SET THE FIRST AND LAST METER IN A ROW AND PULL A STRING BETWEEN THE METERS TO ESTABLISH THE PROPER ALIGNMENT. MINIMUM 48" FROM FINISH GRADE TO TOP OF METER.



DUAL YOKE PARKING METER


SCALE: 3/4"=1'-0"

SINGLE METER HOUSING & PARKING
METER MECHANISM EQUAL TO
DUNCAN MODEL 70 WITH
ELECTRONIC EAGLE. OWNER
FURNISHED CONTRACTOR INSTALLED.

2" NOMINAL DIAMETER GALVANIZED
SCHEDULE 40 PIPE


EXTEND PIPE INTO FOOTING

PROVIDE BUFFER ZONE BETWEEN
END OF PIPE AND BOTTOM OF
CONCRETE SHAFT

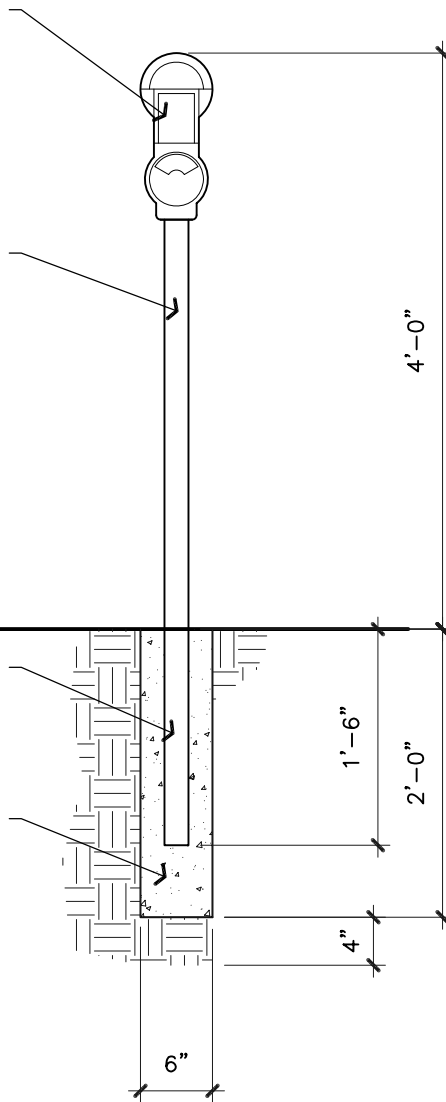

NOTE:


WHERE MORE THAN ONE METER IS TO BE
INSTALLED IN A ROW, THE TOPS AS WELL AS
THE FACE OF ALL METERS SHALL BE ALIGNED.
WHERE NECESSARY SET THE FIRST AND LAST
METER IN A ROW AND PULL A STRING BETWEEN
THE METERS TO ESTABLISH THE PROPER
ALIGNMENT. MINIMUM 48" FROM FINISH GRADE
TO TOP OF METER.



ADA SINGLE PARKING METER


SCALE: 3/4"=1'-0"

SINGLE METER HOUSING & PARKING
METER MECHANISM EQUAL TO
DUNCAN MODEL 70 WITH
ELECTRONIC EAGLE AND DUPLEX
YOKE MOUNT. OWNER FURNISHED
CONTRACTOR INSTALLED.

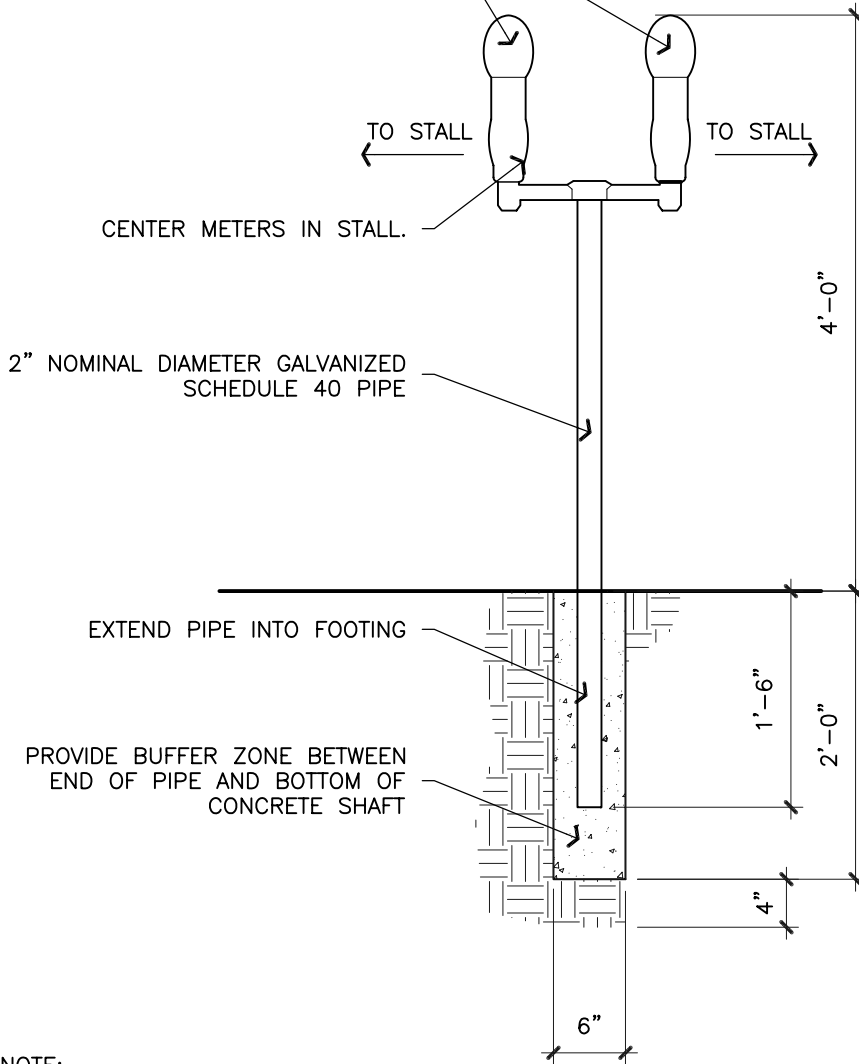

NOTE:

WHERE MORE THAN ONE METER IS TO BE
INSTALLED IN A ROW, THE TOPS AS WELL AS
THE FACE OF ALL METERS SHALL BE ALIGNED.
WHERE NECESSARY SET THE FIRST AND LAST
METER IN A ROW AND PULL A STRING BETWEEN
THE METERS TO ESTABLISH THE PROPER
ALIGNMENT. MINIMUM 48" FROM FINISH GRADE
TO TOP OF METER.



ADA DUAL YOKE PARKING METER

SCALE: 3/4"=1'-0"